

### DESCRIPTION


This Master Station is designed to connect to the IP Intercom Exchange, and provides hands-free conversation of high sound quality. With its space-saving design, this Master Station features the same functions as the Standard Master Station. This station can be mounted to the wall using an optional YC-290 wall mounting bracket.

### SPECIFICATIONS

\*0 dB = 1 V

Power Source	48 V DC (supplied from the IP intercom exchange)
Power Consumption	2.4 W
Wiring Method	Non-polar one pair stranded wire system
Transmission System	2 wire 160 kbps echo canceller transmission system
Signal Level	Under 0 dB*
Speech Method	Hands-free conversation
Audio Frequency Range	300 - 7,000 Hz
Transmission Range	Max. 1500 m (Ø0.65 mm. Loop resistance 170 Ω)
Hands-free	Speaker: 0.6 W, 8 Ω, 5.7 cm cone-type Mic.: Omni-directional electret condenser microphone
Line Connecting Terminal	6P2C modular jack
Setting Method	Desk/Surface mounted master station (When mounting to the wall, use the optional YC-290.)
Operating Temperature	0°C to +40°C
Operating Humidity	Under 90% RH (no condensation)
Finish	Body: ABS resin, gray
Dimensions	92 (W) x 195 (H) x 56.1 (D) mm
Weight	400 g
Accessory	Connection code (3 m)···1
Option	Wall mounting bracket: YC-290

### APPEARANCE



Top View



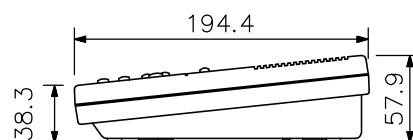



Figure of the  
desktop installation  
(scale: 1/5)

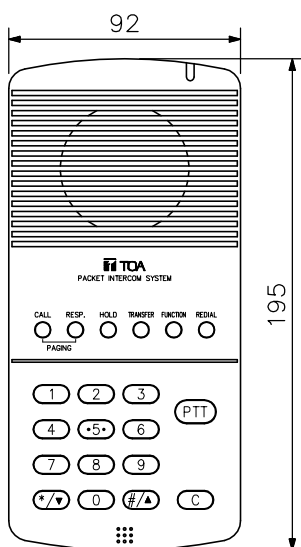

Front View

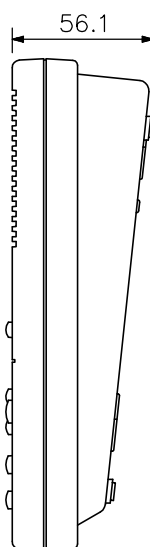

Side View

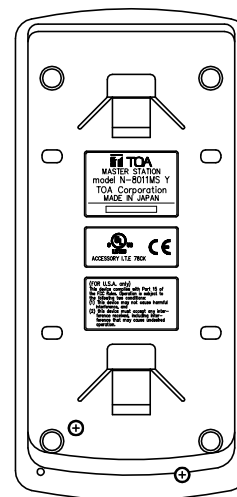

Rear View

UNIT:mm SCALE:1/3