

MICROPHONES

TS-903 TS-904

Thank you for purchasing TOA's Microphone.


Please carefully follow the instructions in this manual to ensure long, trouble-free use of your equipment.

1. GENERAL DESCRIPTION

The TS-903 and TS-904 Microphones are designed for exclusive use with the Chairman units (TS-801, TS-901, TS-811, and TS-911) and the Delegate units (TS-802, TS-902, TS-812 and TS-912) of the TOA Infrared Conference Systems.

The TS-903 is of standard type, and the TS-904 is of long type.

2. INSTALLATION

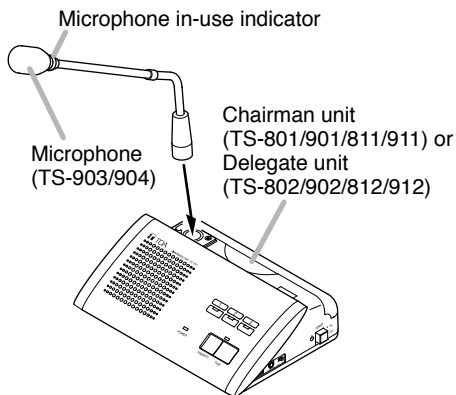

3. SPECIFICATIONS

Model No.	TS-903	TS-904
Type	Electret condenser microphone	
Directivity	Unidirectional	
Rated Impedance	1.8 k Ω	
Rated Sensitivity	-37 dB (1 kHz, 0 dB = 1 V/Pa)	
LED Indicator	Speech indicator (ring type)	
Frequency Response	100 Hz to 13 kHz	
Output Connector	Combined type of XLR-4-12C	
Operating Temperature	0 to 40 °C (32 to 104 °F)	
Operating Humidity	90%RH or less (no condensation)	
Finish	Gooseneck: Stainless steel, black Other: ABS resin, black	
Length	360 mm (14.17")	515 mm (20.28")
Weight	90 g (0.21 lb)	105 g (0.23 lb)
Applicable Unit (Option)	Chairman unit: TS-801, TS-901, TS-811, TS-911 Delegate unit: TS-802, TS-902, TS-812, TS-912	

Note: The design and specifications are subject to change without notice for improvement.

Traceability Information for Europe

Manufacturer:
TOA Corporation
7-2-1, Minatojima-Nakamachi, Chuo-ku, Kobe, Hyogo,
Japan

Authorized representative:
TOA Electronics Europe GmbH
Suederstrasse 282, 20537 Hamburg,
Germany

